


4 sided mesh truck, for bulky loads

Immagini Prodotto

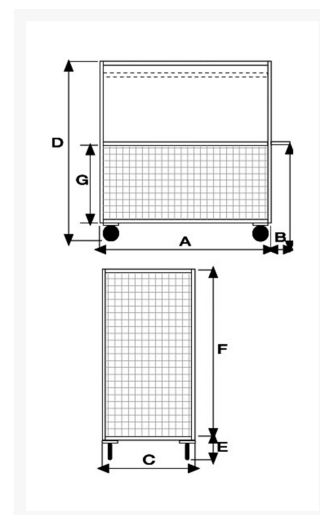

Descrizione

4 poliurethane filled puncture proof casters Ø 260, 2 fixed 2 swivel

Spacing sizes mm 750x1150x1320h

Wire mesh sides 100x100 thread thickness 5

Reinforced steel plate deck

Weight Kg. 58

Capacity Kg. 400

COMPLIANT TO CE RULES

Optional:

Plate shelf

Epoxy powder coating
Coupling device for small tractor
Rear hook

| ART | A | B | C | D | E | F | G |
|----------|------|-----|-----|------|-----|------|-----|
| 078AV-02 | 1200 | 150 | 800 | 1660 | 310 | 1320 | 670 |

Informazioni Aggiuntive

| | |
|----------------|---|
| Cod. Prod. | ART078AV-02 |
| GTIN/EAN | 8053853156525 |
| Fornito | Ruote Montate al Piano, Sponde da Montare |
| Weight kg | 58.0000 |
| Load Capacity | 400 |
| Type of Wheel: | PU Flat Free |
| Colour | Aluminum RAL 9006 |
| Manufacturer | Carmeccanica |
| Made in | Italia |
| Warranty | 5 Years |
| Conformità | CE |
| Lead Time | Pronta Consegna |

Additional Options

| | |
|------------------|--|
| Paracolpi | 2 paracolpi angolari in gomma grigia antitraccia |
| | 4 paracolpi angolari in gomma grigia antitraccia |
| Antirombo | Applicazione antivibrante sun 1 piano |